



**VINYL FLOORING
RIGIO**

INTRODUCTION

SUPERRESISTANT FLOORS 07

WOOD OR CONCRETE? 08

RIGIO

WOOD EFFECT 10

CONCRETE EFFECT 24

RIGIO PROPERTIES 30

PARAMETERS 39

SUMMARY OF DESIGNS 40

VOXBOX 44

WITH NATURE IN MIND 46



F R E E D O M B E G I N S


at home

At VOX, we believe that real freedom begins at home, and the interior is more about your individual needs and lifestyle than a specific design. That is why our goal is to inspire, advise, and provide comprehensive interior design solutions – matching series of furniture, doors, floors, and decorative walls.

RIGIO. SUPER- RESISTANT FLOORS

Decorating a home is a pleasant, but very challenging task. At VOX, we know how difficult it really is, which is why, while designing the new flooring, we took into account both aesthetics and functionality. Rigio with rigid core technology (containing mineral fibre) is state-of-the-art vinyl flooring with high performance characteristics. It will be perfect for the whole house – from the hallway to the kitchen and bathroom.

WOOD OR CONCRETE?

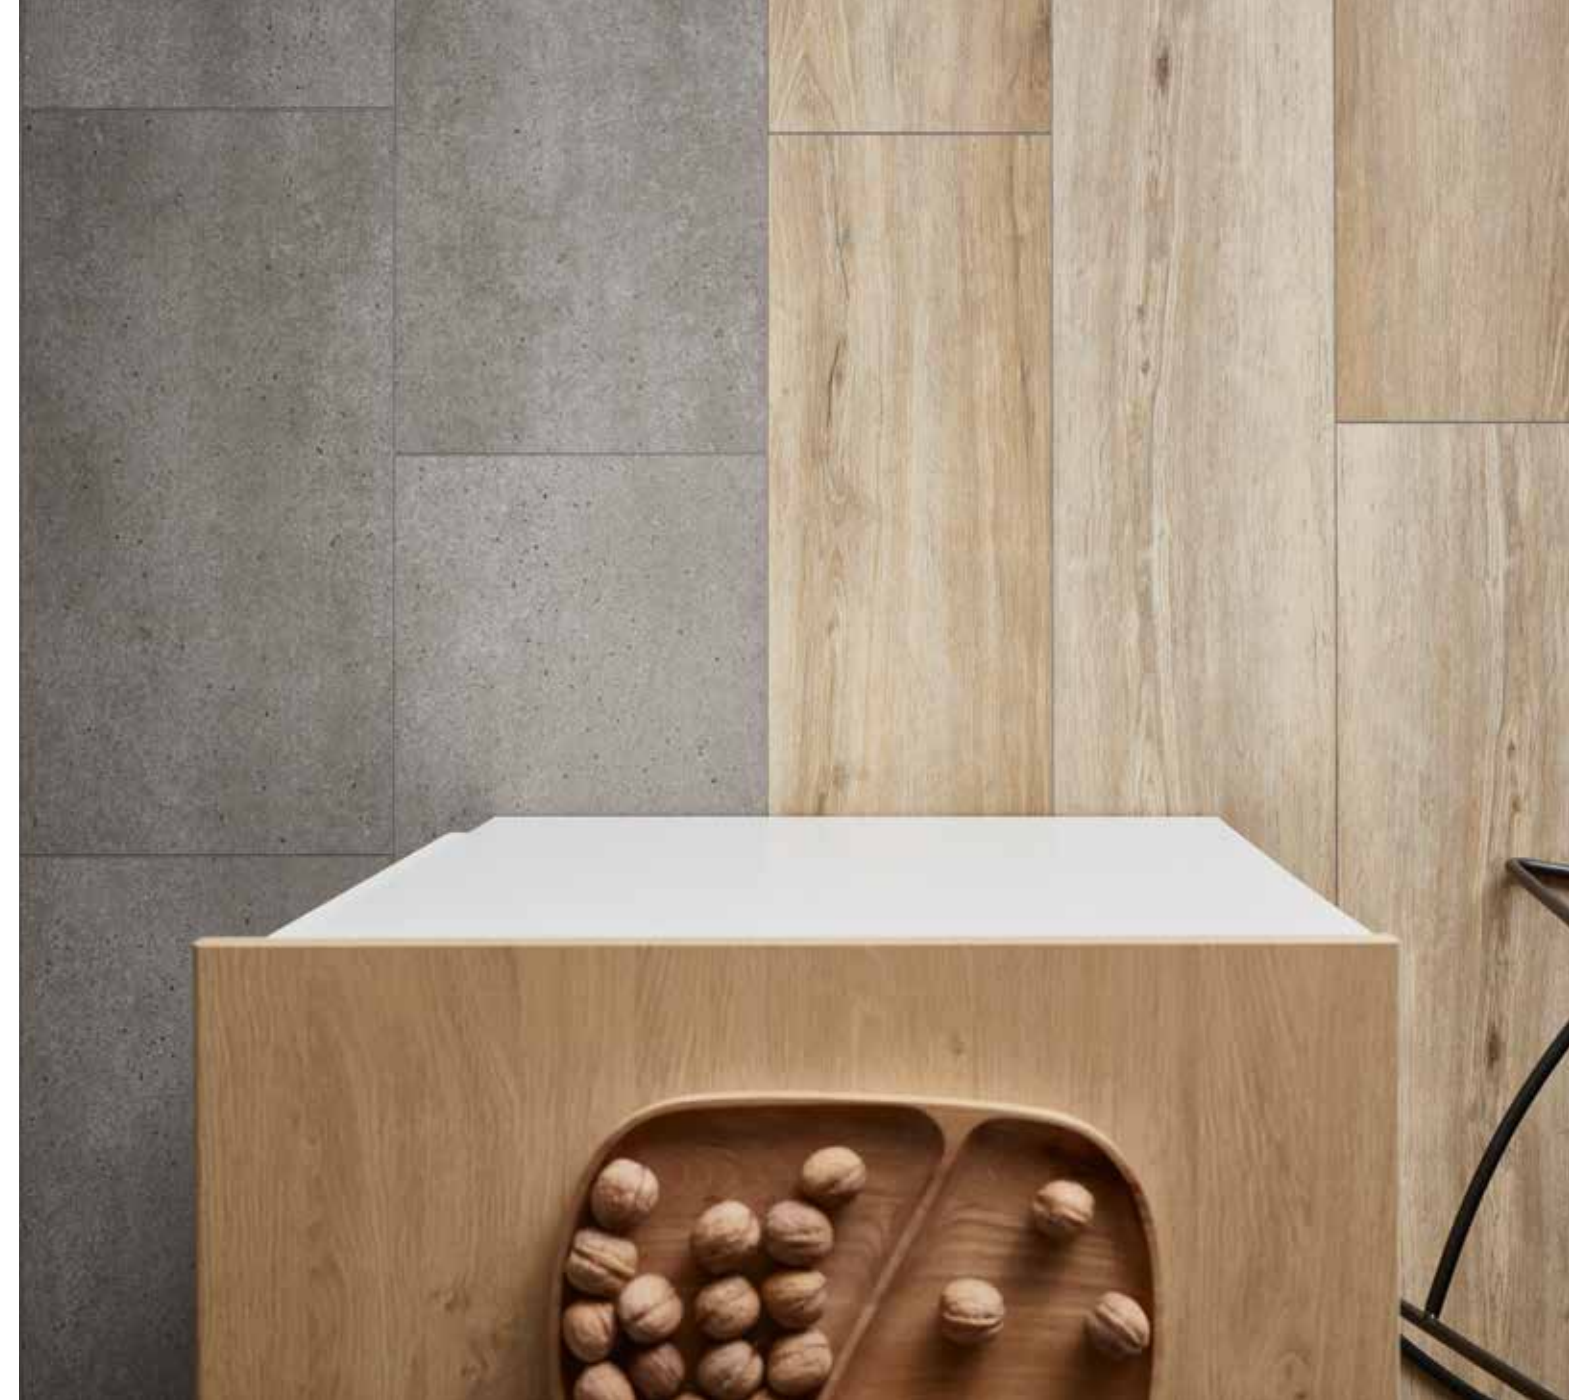

Simply choose from 15 different designs inspired by the beauty of wood or the rawness of concrete. Deep structure on the surface of the panels and the two-step matt varnish application make the floor look very glamorous. Thanks to the special embossing technology and the use of a dark grey painted V grooves, the panels look even more like authentic planks or pieces of concrete.



WOOD EFFECT

RIGIO, OAK KOTTO



RIGIO, OAK PRIAR



OAK PRIAR



OAK KOTTO

Dimensions | 1220 x 229 mm

Thickness | 5 mm without underlayment | 6,5 mm with underlayment



OAK APPO



OAK BORE

Dimensions | 1220 x 229 mm
 Thickness | 5 mm without underlayment | 6,5 mm with underlayment



RIGIO, OAK BORE



RIGIO, OAK HERME



OAK HERME



OAK LUNAR

Dimensions | 1220 x 229 mm
Thickness | 5 mm without underlayment | 6,5 mm with underlayment

See what the interior
looks like with
Rigio Oak Lunar flooring





OAK DEMES



OAK LETA

Dimensions | 1220 x 229 mm
 Thickness | 5 mm without underlayment | 6,5 mm with underlayment



RIGIO, OAK LETA



RIGIO, OAK PALLAR



OAK PALLAR



OAK EURIS

Dimensions | 1220 x 229 mm

Thickness | 5 mm without underlayment | 6,5 mm with underlayment



OAK HYPERIO



OAK NIKER

Dimensions | 1220 x 229 mm
 Thickness | 5 mm without underlayment | 6,5 mm with underlayment



RIGIO, OAK NIKER



CONCRETE
EFFECT


RIGIO, CONCRETE DARK



RIGIO, CONCRETE DARK



CONCRETE DARK

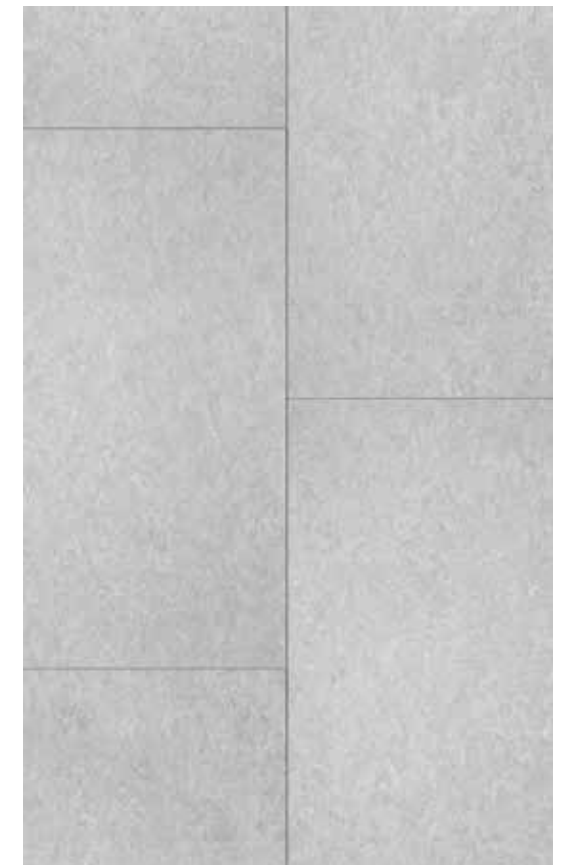

CONCRETE LIGHT

Dimensions | 300 x 600 mm
Thickness | 5 mm without underlayment | 6,5 mm with underlayment



CONCRETE GROUND

Dimensions | 300 x 600 mm
Thickness | 5 mm without underlayment | 6,5 mm with underlayment




WATER RESISTANCE



Rigid core vinyl flooring can even be laid in the bathroom. The structure and material of the panels prevent liquids from soaking into their surface. Direct contact with water and high humidity do not affect the parameters of Rigio. The patented L2C lock, which ensures that the panels are perfectly and tightly joined together, provides additional protection against difficult conditions.



STAIN RESISTANCE

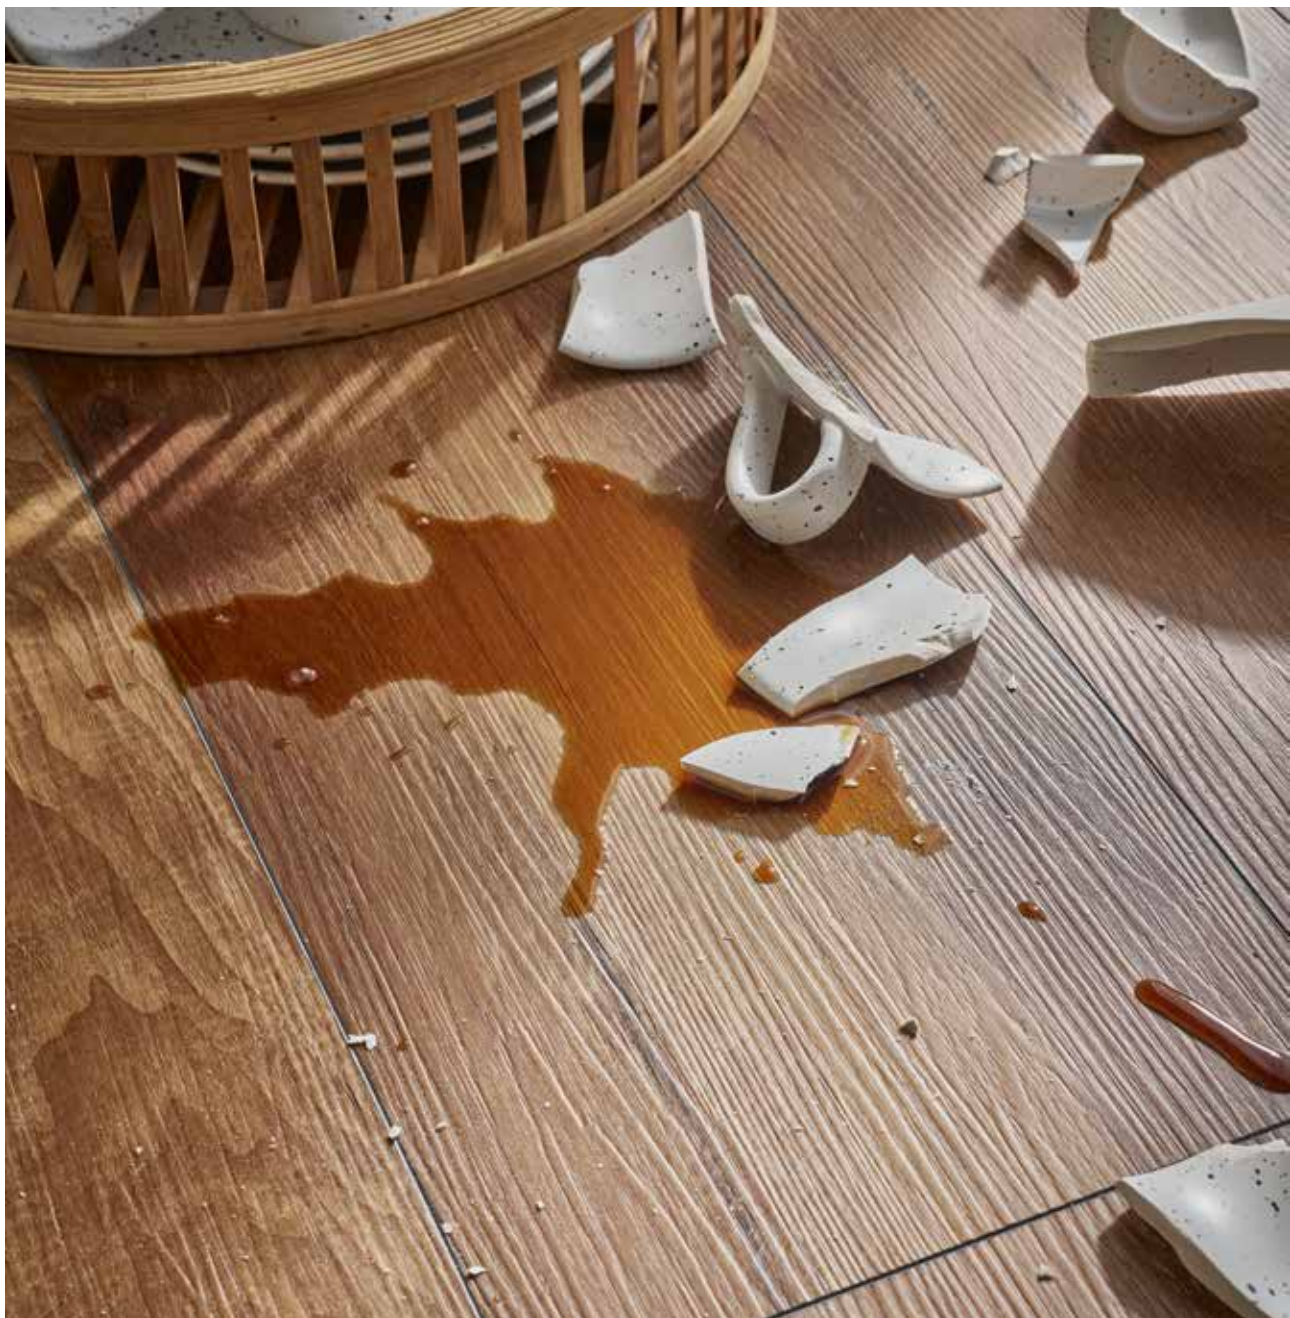

Rigio is extremely dirt-resistant: the floor is covered with a wear layer which is very easy to clean even after the stains dry. In addition, a protective coating prevents dirt penetration. Spilled red wine, coffee or tea can be removed with a sponge, lukewarm water and maybe a little floor cleaner. Rigio flooring is ideal for allergy sufferers and asthmatics: the anti-static nature of the panels means that dust or pet hair is not attracted to their surface.



DURABILITY



The parameters of Rigio floors, including the high utilisation class of 42, make them suitable even for commercial spaces. A polyurethane top layer protects the floor from scratches. The high quality and durability of the Rigio panels is also guaranteed by the high-end lock made using a patented technology. The high resistance to impact and mechanical damage is confirmed by a 20 year guarantee.



WITH OR WITHOUT UNDERLAYMENT



In order to shorten the process of selecting underlayment and the time it takes to install the floor, we developed a version of Rigio floor with an integrated underlayment. The high quality IXPE underlayment is 1.5 mm thick. A version without underlayment (panel thickness: 5 mm) is also available.




CARE



PIOTR SZCZĘŚNIAK
VOX TECHNICAL EXPERT

Rigio flooring does not require aggressive care products. All you need is water with floor cleaner. Dust can be easily removed with a Hoover (cleaning robots will do the job too). Dried stains should be washed off with a damp sponge. We do not recommend the use of: steam cleaners/vacuum cleaners, abrasive powders, acetone or solvents, products based on oil, waxes or varnish.

FLOATING OR USING ADHESIVE*

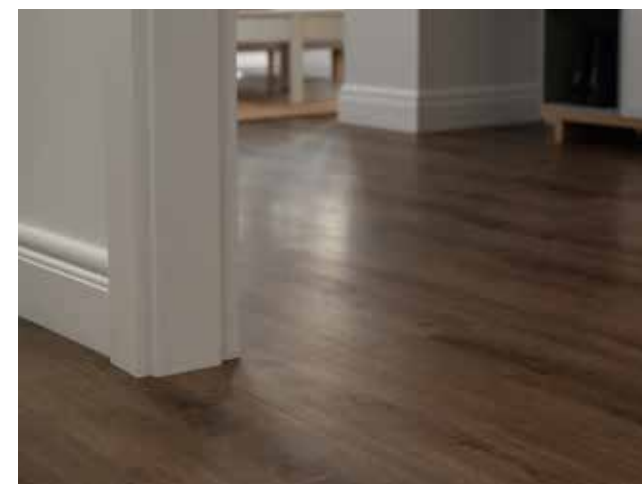

WITHOUT EXPANSION JOINTS

A threshold expansion joint is a special gap left between rooms, masked with a flooring profile. With Rigio, expansion joints between rooms are not necessary. This makes it possible to lay a uniform floor in the entire flat, over an area of up to 100 m².



ON CONCRETE

If you want to install our panels on concrete underlayment, we recommend choosing Rigio with integrated underlayment or using a dedicated Max-Pod Alu Extreme underlayment, which will increase sound absorption.



ON AN EXISTING FLOOR

Multiple layers and rigid core properties make Rigio flooring thick and rigid (compared to other vinyl floors). As a result, it can be installed, for example, over ceramic tiles without the levelling of shallow grouts. Check the product sheet to see what level of unevenness of the floor is allowed when installing our flooring.

* Installation with adhesive only applies to panels without the integrated underlayment.

10 LAYERS FOR SUPERIOR DURABILITY

Flooring thought through layer by layer. Each layer adds a different property to create an unprecedented final effect - a combination of the best design, a pleasant softness and unparalleled durability.

PU VARNISH

Extremely resistant polyurethane coating protects the floor from scratches and stains and facilitates care. The special varnish application technology and matte finish give it a natural look.

DECORATIVE LAYER

A precisely printed and embossed pattern inspired by wood or concrete. The proprietary production technology allows for less repetitive printing, which makes the panels look more natural.

SOUND ABSORBING LAYER

Greatly reduces noise levels by suppressing the sound of footsteps and other acoustic effects.

RIGID CORE

Despite its low weight, it is extremely resistant, guaranteeing the long-term durability of the floor. Its unique production technology uses recycled materials which contributes to the protection of the environment.



ANTI-WEAR LAYER

It gives the product the highest visual quality and excellent durability properties.

MINERAL FIBRES

Thanks to the double reinforcement of the structure with dense mineral fibre, the floor remains dimensionally stable regardless of temperature changes.

COMPACT LAYER 1

Extremely durable, it protects the floor from dents and other mechanical damage.

COMPACT LAYER 2

This specially developed robust bottom layer prevents deformation of the floorboards. It enables them to be installed on uneven surfaces.

INTEGRATED UNDERLAYMENT

Reduces floating flooring installation time. It is an optional layer, i.e. Rigio also comes in a version without a pre-integrated underlayment.



ADVANTAGES

	WATER RESISTANCE
	SHOCK RESISTANCE
	RESISTANCE TO TEMPERATURE CHANGES
	STAIN RESISTANCE
	IDEAL FOR FLOOR HEATING
	20-YEAR GUARANTEE
	INTEGRATED UNDERLAYMENT
	STRONG CLICK LOCK
	MATT SURFACE
	DEEP STRUCTURE
	PAINTED V-GROOVE
	QUIET FLOOR
	WALKING COMFORT
	FOR UNEVEN FLOORS
	UTILISATION CLASS
	ANTI-SLIP

PARAMETERS

THICKNESS	5 MM	6,5 MM (5 MM + 1.5 MM IXPE UNDERLAYMENT)
USE SURFACE	0,55 mm	0,55 mm
DIMENSIONS (WOOD EFFECT) DIMENSIONS (CONCRETE EFFECT)	5 x 1220 x 229 mm 5 x 300 x 600 mm	6,5 x 1220 x 229 mm 6,5 x 300 x 600 mm
UTILISATION CLASS	33/42	33/42
CONNECTION METHOD	L2C UNILIN PATENDED TECHNOLOGY AA 0734000000	L2C UNILIN PATENDED TECHNOLOGY AA 0734000000
SURFACE AREA PER PACK	2,235 m² (1220 x 229) 8 panels 1,8 m² (300 x 600) 10 panels	2,235 m² (1220 x 229) 8 panels 1,8 m² (300 x 600) 10 panels
THERMAL RESISTANCE	0,0154 m² K/W EN 14041:2004/AC:2006	0,031 m² K/W EN 14041:2004/AC:2006
UNDERFLOOR HEATING	T <27 C	T <27 C
FLAMMABILITY CLASS	Bf1-S1 EN 14041:2004/AC:2006	Bf1-S1 EN 14041:2004/AC:2006
FORMALDEHYDE EMISSIONS	E1 EN14041:2004/AC:2006	E1 EN14041:2004/AC:2006
SLIPPERINESS	R9	R9
CE	CE 210226008SHF-VOC001	CE 210226008SHF-VOC001
DIMENSIONAL STABILITY	< 0,05 %	< 0,05 %
GUARANTEE FOR HOUSING CONDITIONS	20 years	20 years

SUMMARY OF DECORS



OAK PRIAR



OAK APPO



OAK KOTTO



OAK NIKER



OAK DEMES



OAK HYPERIO



OAK BORE



OAK HERME



OAK LUNAR



CONCRETE LIGHT



CONCRETE DARK



CONCRETE GROUND



OAK LETA



OAK PALLAR



OAK EURIS

SELECT SKIRTING BOARDS


At VOX, we approach interiors holistically. This is why we have created a flooring system that includes, in addition to the flooring collection, stylistically matching skirting boards and high-quality underlayments.

Espumo skirting boards are made using the innovative Kerracore technology. They are not only lightweight, but also shock-resistant. Good water resistance properties make them suitable for rooms exposed to moisture.


ESPUMO SKIRTING BOARDS

Baseboard length: 250 cm.


ESP101

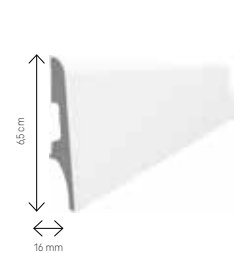


ESP201




ESP301




ESP401



ESP202



ESP203



ESP205



INSTALLATION
WITH ADHESIVE



SHOCK
RESISTANCE



MOISTURE
RESISTANCE



FINISHING
ACCESSORIES

SELECT UNDERLAYMENT




IXPE INTEGRATED WITH THE PANEL

The Rigio collection includes a version with a preintegrated underlayment that significantly reduces costs and floor installation time.



THICKNESS

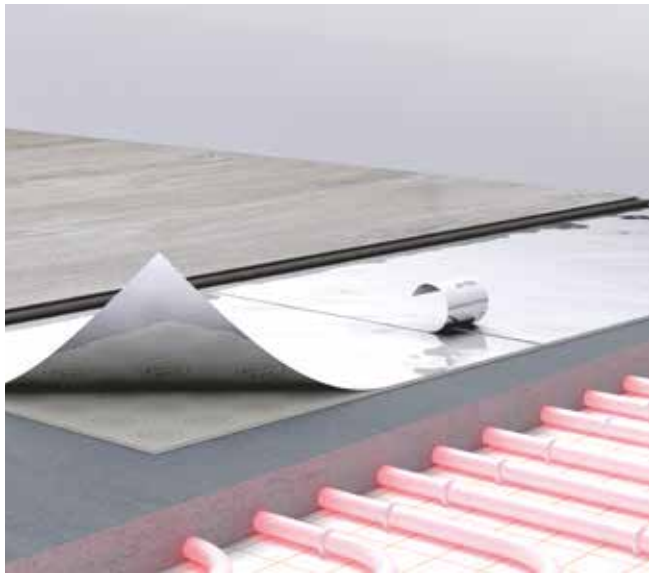


MAX-POD ALU EXTREME

Permanently elastic underlayment with the patented RWS Barrier technology for optimum footstep soundproofing. It is designed for rooms subject to intensive use. It guarantees the highest efficiency of underfloor heating. An underlayment for the most demanding.



THICKNESS



THERMAL
CONDUCTIVITY



LOAD
RESISTANCE



PROTECTION
FROM MOISTURE



ACOUSTIC
INSULATION



SOUNDPROOFING



GREEN PRODUCT – 97%
NATURAL INGREDIENTS

DESIGN YOUR INTERIOR IN VOXBOX

DESIGN

and arrange your home space with a wide selection of floors, doors, furniture, lamps and VOX accessories.

PRICE

the whole project and get a detailed calculation. You don't need to bother yourself with numbers. The program will do the work for you, e.g., it will count the required number of packs with floor panels

ORDER

the products of your choice by going directly from your design to the VOX on-line shop. If you create the design in one of our VOX showrooms, the assistant will help you place the order.



In 2020, VOXBOX won the 'Dobry Wzór' award. The jury pointed out the practicality and usefulness of the app that helps design dream interiors directly in an Internet browser. Also, its interface, friendly even to an unexperienced user, has been appreciated by the jury.



YOU CAN SEE YOUR DESIGN IN VR TECHNOLOGY IN OUR SHOWROOM STORES.

LOOKING FOR INSPIRATION?

Use our range of ready-made designs. All you have to do is alter the dimensions of the default designs to match your interior.

voxbox.pl/en




FLOOR AND LIGHT

One of the functionalities of VOXBOX is the possibility to view the selected floor in different lighting (natural: daytime/afternoon/evening and with additional light sources).

FLOOR SELECTION

VOXBOX provides almost 300 flooring designs to choose from. In addition to all VOX collections, solutions offered by Quick-Step, Gerflor and Egger, among others, are also available in the program.

WITH NATURE IN MIND

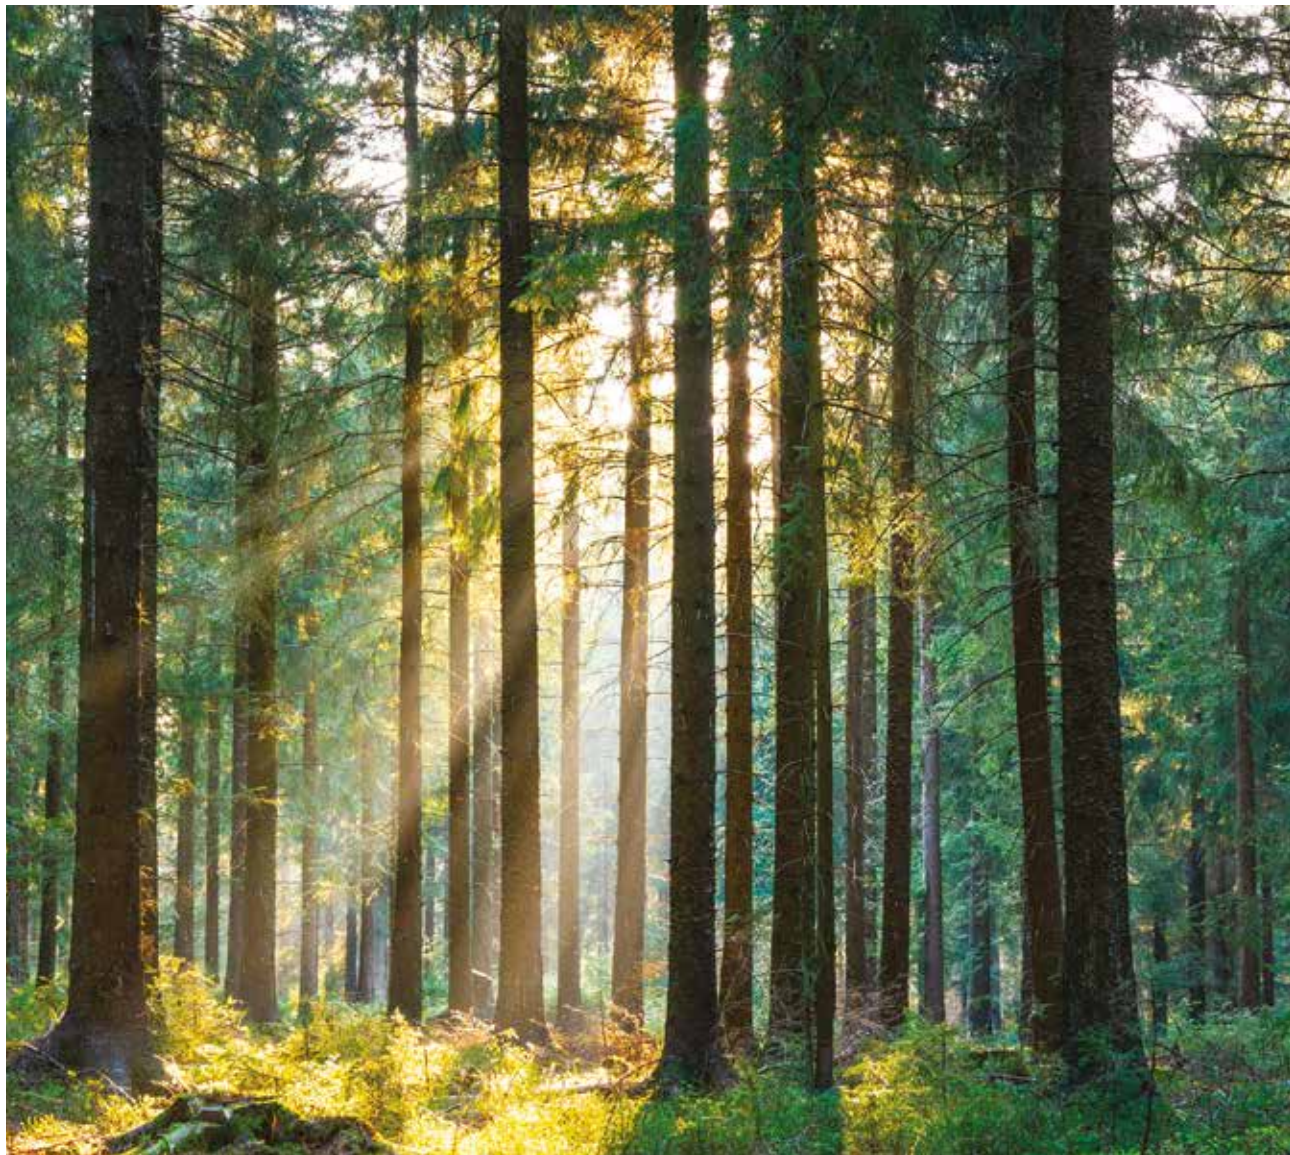

In Rigio floors, the core is made exclusively from natural materials (rocks) such as quartz and chalk. Suitably treated, they are shredded and bound using plasticisers – the same as those used to make children's toys or food packaging. Our products are safe, free from ortho phthalates and other volatile compounds.



The floors meet the requirements of low-emission products, which is confirmed by an appropriate certificate (E1 standard). They are 100% recyclable. Rigio's flooring packaging is made from recycled raw cardboard. We don't coat the packaging with any varnish – it's raw cardboard that can be fully recycled again.



The manufacturer reserves the right to make changes to the colours, dimensions, and functions of the presented products. This catalogue is published for reference purposes only. The catalogue presents sample designs from the product range. Some of the items presented in the layout photos are only used as decoration and are not for sale. Copying and distribution of any materials contained in the catalogue without the written consent of the publisher is prohibited. Colours presented in the catalogue may differ from reality. All data contained in the catalogue are valid for the month in which the catalogue goes to print – June 2023.

